


# MinGrate® Pultruded Grating

Maximum panel size: 5ft x 20ft


Standard colors: Light Gray, Dark Gray, Yellow, Green.

Standard cross bar spacing: 6" on center or optional 12".


Custom lengths, colors, bar spacing, and finishes are available.

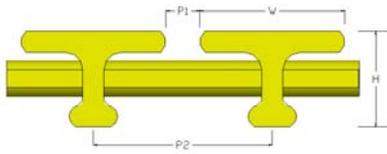

Type	Height	W	P1	P2	Open Area	3 cores Interlocking Rod lb/ft²	
T-1018	1"	1.625"	0.375"	2.0"	18%	2.82	
T-1033	1"	1.625"	0.775"	2.4"	33%	2.29	
T-1012	1"	1.5"	0.20"	1.70"	12%	2.96	
T-1025	1"	1.5"	0.5"	2.0"	25%	2.51	
T-1038	1"	1.5"	0.9"	2.4"	38%	2.08	
T-1512	1-1/2 "	1.5"	0.2"	1.7"	12%	4.01	
T-1525	1-1/2 "	1.5"	0.5"	2.0"	25%	3.41	
T-1538	1-1/2 "	1.5"	0.9"	2.4"	38%	2.90	
T-1550	1-1/2 "	1.0"	1.0"	2.0"	50%	2.11	
T-2033	2"	1.0"	0.5"	1.5"	33%	4.14	
T-2050	2"	1.0"	1.0"	2.0"	50%	3.20	

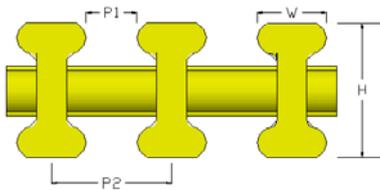

Type	Height	W	P1	P2	Open Area	CD Interlocking Rod lb/ft²	3 cores Interlocking Rod lb/ft²
I-1040	1"	0.6"	0.4"	1.0"	40%	3.19	3.49
I-1050	1"	0.6"	0.6"	1.2"	50%	2.60	2.90
I-1060	1"	0.6"	0.9"	1.5"	60%	1.98	2.29
I-12540	1-1/4 "	0.6"	0.4"	1.0"	40%	3.75	4.05
I-12550	1-1/4 "	0.6"	0.6"	1.2"	50%	3.25	3.56
I-12560	1-1/4 "	0.6"	0.9"	1.5"	60%	2.45	2.76
I-12540	1-1/2 "	0.6"	0.4"	1.0"	40%	4.29	4.50
I-1540	1-1/2 "	0.6"	0.4"	1.0"	40%	4.30	4.50
I-1550	1-1/2 "	0.6"	0.6"	1.2"	50%	3.70	3.90
I-1560	1-1/2 "	0.6"	0.9"	1.5"	60%	3.17	3.29

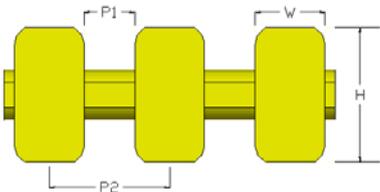

Type	Height	W	P1	P2	Open Area	3 cores Interlocking Rod lb/ft²	
HD-2040	2"	0.6"	0.4"	1.0"	40%	14.38	
HD-2050	2"	0.6"	0.6"	1.2"	50%	10.68	
HD-2060	2"	0.6"	0.9"	1.5"	60%	8.89	